Installation of LED Undercabinet Lighting System

Read and understand these instructions before installing luminaire:

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference

Single Unit-Installation Instructions:

1. Choose which side to run POWER CORD from and remove END CAP, by pressing down on TAB and pulling away from LUMINAIRE HOUSING (FIG.2). Insert CONNECTOR on POWER CORD into RECEPTICLE on LED BOARD ASSEMBLY (not shown) in LUMINAIRE HOUSING.
2. Run POWER CORD through GROOVE IN END CAP and out opening in back of END CAP. Snap END CAP back into LUMINARE HOUSING (FIG.1).
3. Align SCREWS (by others) with mounting holes and drive into MOUNTING SURFACE to firmly secure luminaire (FIG.3&4). Use appropriate screws for mounting surface type.
4. Run POWER CORD to remote power supply and wire POWER CORD into 24VDC side of LED-RPS-50 (not shown) power supply only (See instruction sheet for LED-RPS-50 for detailed instructions.). A maximum of (5) MIC100 series luminaires can be used per LED-RPS-50 power supply (see sheet (2) for multiple MIC100 series luminaire installation instructions).

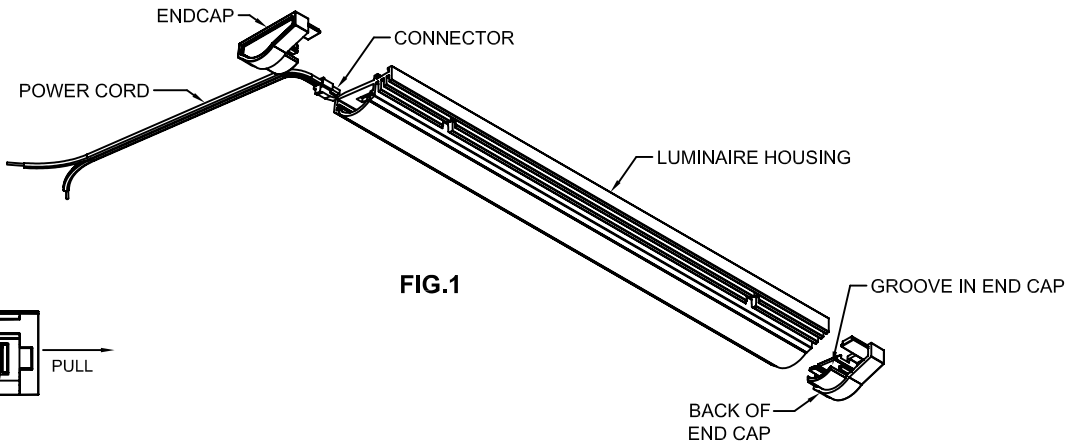

FIG.1

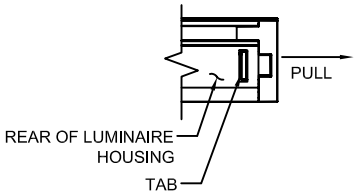

FIG.2

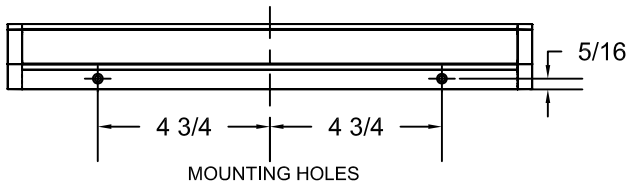

FIG.3

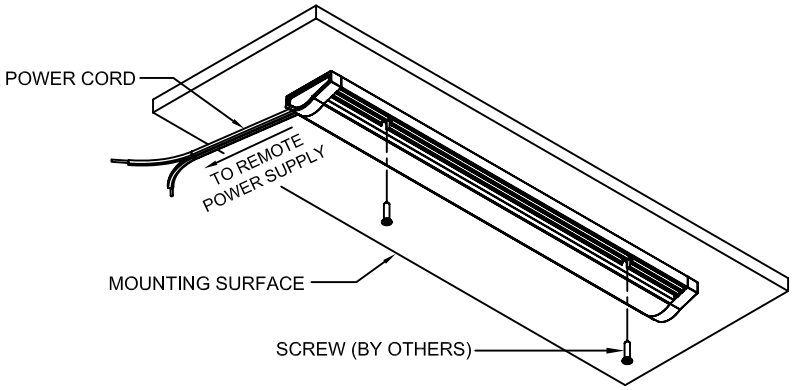

FIG.4

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A0508

Lightolier is a Philips group brand

PHILIPS

Read and understand these instructions before installing luminaire:

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.
Retain these instructions for maintenance reference

Multiple Unit-Installation Instructions:

1. Remove END CAPS, by pressing down on TAB and pulling away from LUMINAIRE HOUSING (FIG.2).
2. Insert CONNECTOR from JUMPER into RECEPTACLE on LED BOARD ASSEMBLY in LUMINAIRE HOUSING.
3. Feed opposite end of JUMPER through JOINER and install JOINER to LUMINAIRE HOUSING snapping TAB into place (FIG.1).
4. Insert CONNECTOR into RECEPTACLE in adjoining luminaire.
5. Assemble the second LUMINAIRE HOUSING to the JOINER (FIG.1&3).
6. Repeat steps 1-4 for any additional LUMINAIRE HOUSINGS. You can have up to (5) MIC100 Series MAX.
7. Choose which side to run POWER CORD from and insert CONNECTOR on POWER CORD into RECEPTICLE on LED BOARD ASSEMBLY in LUMINAIRE HOUSING.
8. Run POWER CORD through GROOVE IN END CAP and out opening in back of END CAP. Snap END CAP back into LUMINARE HOUSING (FIG.1).
9. Snap other END CAP into remaining open LUMINAIRE HOUSING end.
10. Align SCREWS with mounting holes and drive into MOUNTING SURFACE to firmly secure luminaire/s (FIG.3). Use appropriate screws for mounting surface type.
11. Run POWER CORD to remote power supply and wire POWER CORD into 24VDC side of LED-RPS-50 (not shown) power supply only (See instruction sheet for LED-RPS-50 for detailed instructions.).

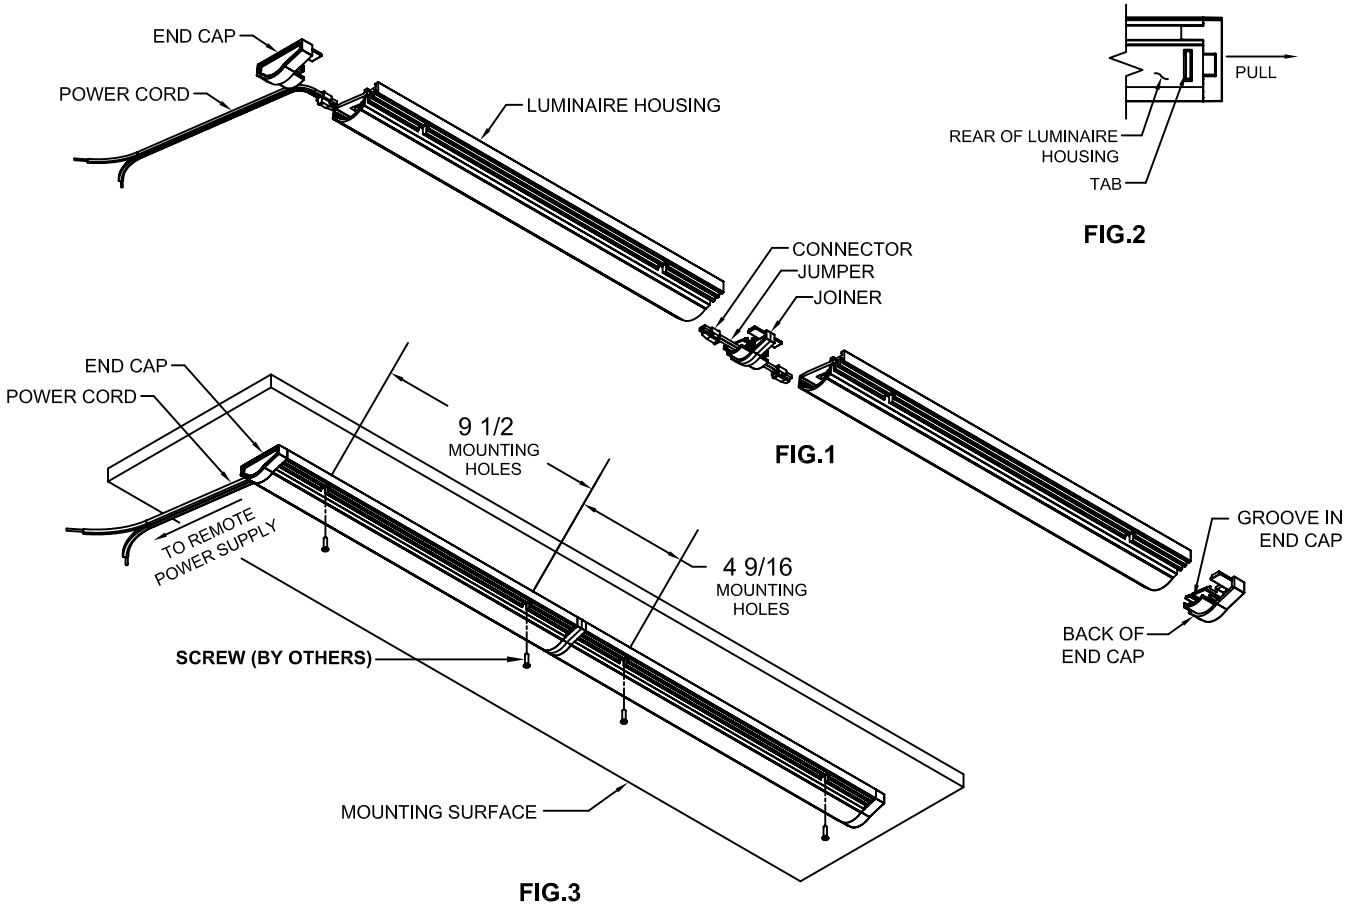

FIG.1

FIG.2

FIG.3

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A0508